
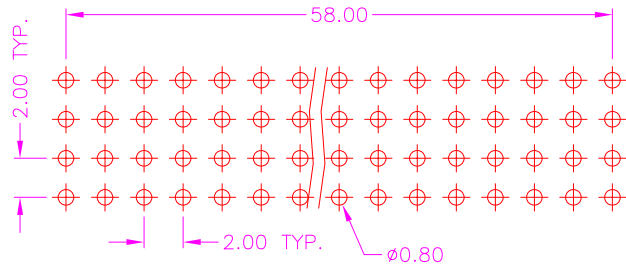

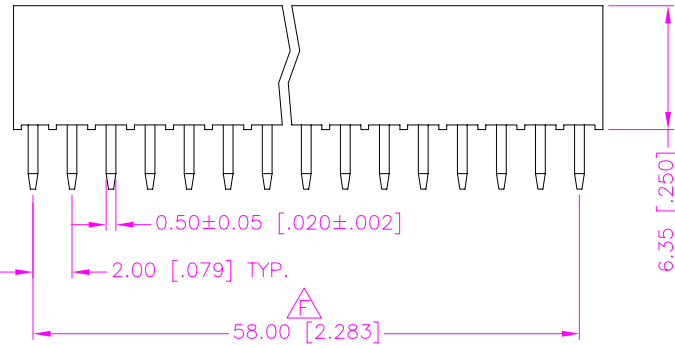


REV.	DESCRIPTION	DATE
A	RELEASE	Nov. 29, 2000
B	MATERIALS MODIFY	Jun. 1, 2001
C	P/N MODIFY	Aug. 13, 2001
D	DRAW MODIFY	Nov. 11, 2003
E	RoHS MODIFY	Jun. 09, 2005
F	DRAW. MODIFY	Sep. 24, 2009

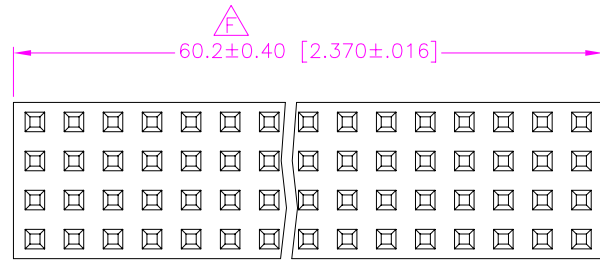

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

- HOUSING : NYLON 6T (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

PART NUMBER INFORMATION :

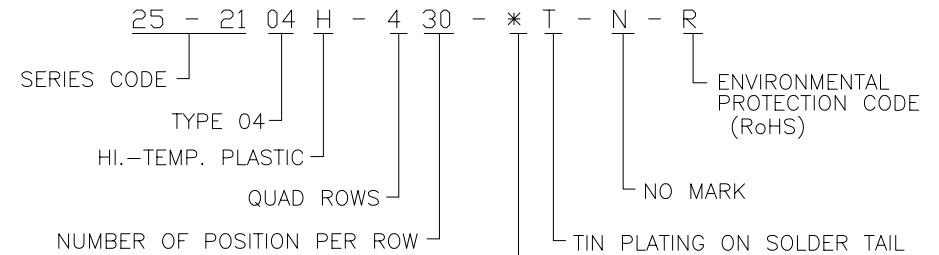

- CONTACT PLATING OPTIONS
- : GOLD FLASH
 - : .000010" GOLD
 - : .000015" GOLD
 - : .000030" GOLD

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>JNG</i>	 WWW.ASTRON.COM.TW	
 UNITS : mm [inch]	CHECK <i>BEN</i>		NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT VERTICAL
SCALE NONE	SIZE A4	APP'D <i>ERJC</i>	DRAW NO. C25-2104H-430-XT-N-R
SHEET 1 OF 1	REV. F	(A)	H0007